

E - THEORY/OPERATION

1994 Toyota Celica

1994 ENGINE PERFORMANCE
Toyota Theory & Operation

Celica

INTRODUCTION


This article covers basic description and operation of engine performance-related systems and components. Read this article before diagnosing vehicles or systems with which you are not completely familiar.

COMPUTERIZED ENGINE CONTROLS

TOYOTA COMPUTER CONTROL SYSTEM (TCCS)


The TCCS is a computerized emission, ignition and fuel injection control system. The TCCS lowers exhaust emissions while maintaining good fuel economy and driveability. System consists of various sensors, switches and control units. See Figs. 1 and 2.

An Engine Control Module (ECM) controls the TCCS based on input signals received from various input devices. The ECM contains preprogrammed data to maintain optimum engine performance under all operating conditions.

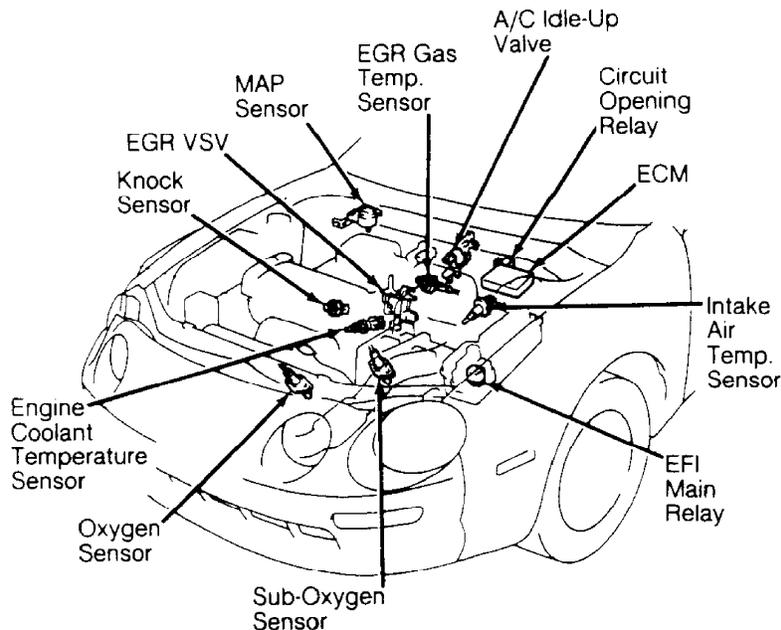

94I44378

Fig. 1: Locating TCCS Components (1.8L)
Courtesy of Toyota Motor Sales, U.S.A., Inc.

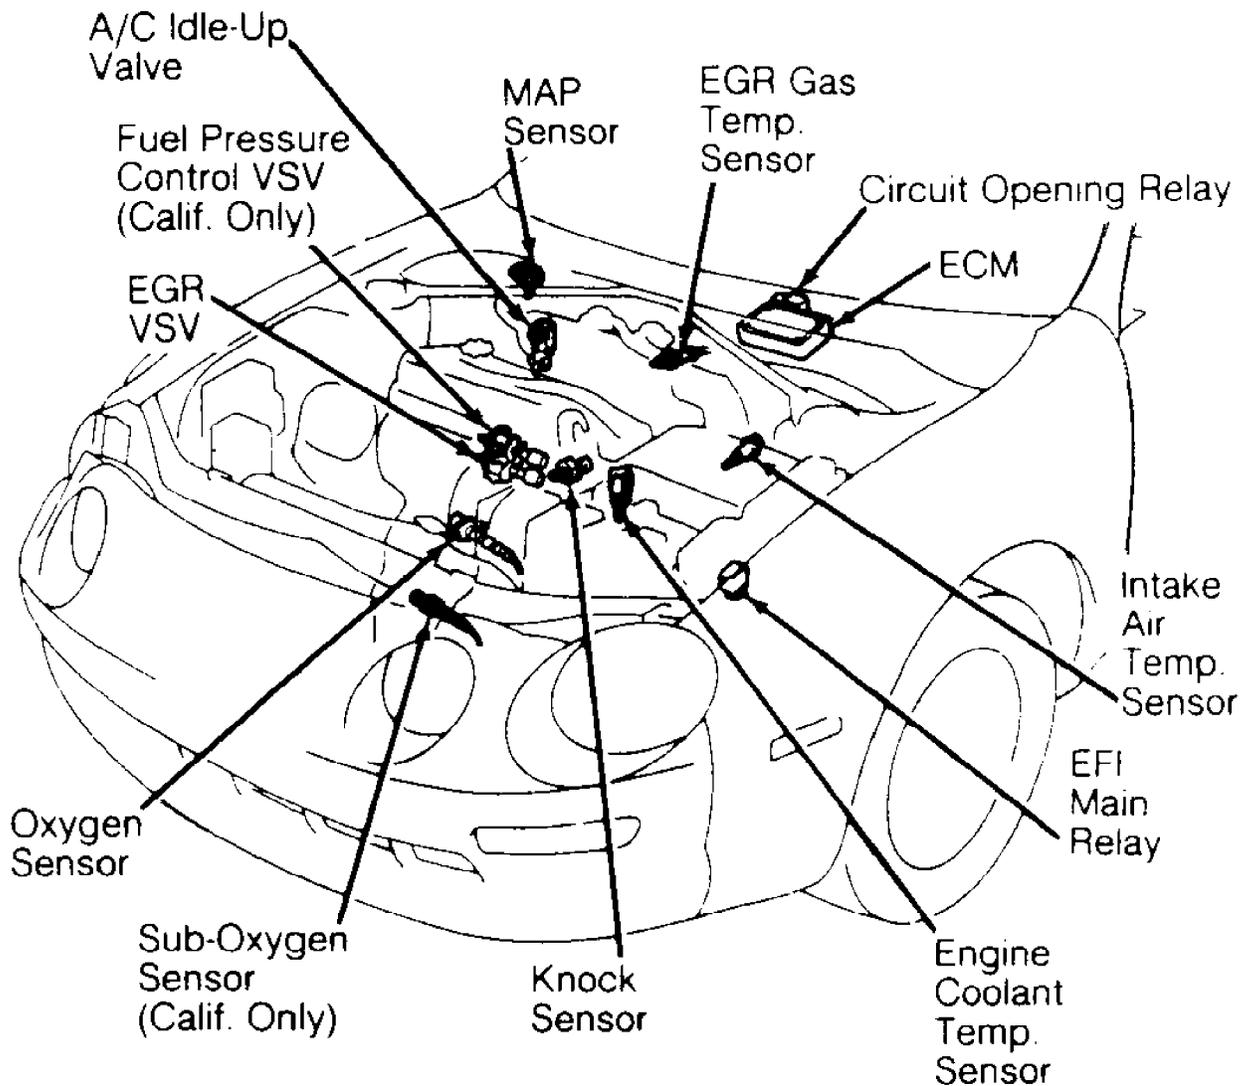

94I44379

Fig. 2: Locating TCCS Components (2.2L)
 Courtesy of Toyota Motor Sales, U.S.A., Inc.

ENGINE CONTROL MODULE

The Engine Control Module (ECM) microcomputer receives input signals from various sensors, switches, and ignition and starting system components. The ECM uses this information for controlling various functions. See OUTPUT SIGNALS under COMPUTERIZED ENGINE CONTROLS.

The ECM has constant battery voltage at BATT terminal. The ECM contains a fail-safe function, used in case of sensor or switch failure. Fail-safe function uses preprogrammed values to provide a limp-in mode for minimal driveability. If a failure exists, ECM will inform the driver by turning on Malfunction Indicator Light (MIL) on the instrument panel.

NOTE: The MIL light may also be referred to as the CHECK ENGINE light.

The ECM is equipped with a self-diagnostic function. Diagnostic trouble codes may be set by the malfunction of various engine sensors, switches or circuits, and stored in the ECM memory. When certain diagnostic trouble code is stored, Malfunction Indicator Light (MIL) on instrument panel may come on.

ECM LOCATION TABLE

Model	Location
Celica	Below Passenger's Side Of Dash, Underneath The Carpet

NOTE: Components are grouped into 2 categories. First category is INPUT DEVICES, which covers components that control or produce voltage signals monitored by the Engine Control Module (ECM). Second category is OUTPUT SIGNALS, which are components controlled by the ECM.

INPUT DEVICES

Vehicles are equipped with different combinations of input devices. Not all devices are used on all models. To determine input device usage on a specific model, see appropriate wiring diagram in L - WIRING DIAGRAMS article. Available input signals include the following:

A/C Switch

When A/C is turned on, input signal is delivered to Engine Control Module (ECM). The ECM uses input signal to control engine idle speed during A/C operation.

NOTE: Airflow meter may be referred to as Volume Airflow (VAF) meter or Mass Airflow (MAS) meter.

Battery Signal

Battery voltage is always present at BATT terminal of Engine Control Module (ECM). When ignition is turned on, voltage for ECM operation is applied through EFI main relay to terminal +B and terminal +B1 (on some models).

Engine Coolant Temperature (ECT) Sensor

The ECT contains a built-in thermistor in which resistance varies according to engine coolant temperature. The ECT delivers an input signal to THW terminal of Engine Control Module (ECM). The ECM uses input signal for controlling Pulsed Secondary Air Injection (PAIR) system (if equipped), fuel injection system, overdrive operation on electronically controlled transaxles/transmissions, ignition timing (spark advance), idle speed control system, fuel pressure control system (if equipped), heated oxygen sensor system (if equipped) and EGR system.

Electrical Load Signal

An input signal is delivered to ELS terminal of Engine Control Module (ECM) to indicate when high electrical output is required. This signal is delivered when items such as rear window defroster, headlights, etc. are turned on. The ECM uses input signal to maintain proper idle speed.

Engine Cranking Signal

While engine is cranking and voltage is applied to the

starter an input signal is also delivered to STA terminal of Engine Control Module (ECM). The ECM uses input signal for controlling Pulsed Secondary Air Injection (PAIR) system (if equipped), fuel injection system, ignition timing (spark advance) and idle speed control system.

NOTE: The EGR gas temperature sensor may be referred to as EGR function sensor.

EGR Gas Temperature Sensor

EGR gas temperature sensor monitors EGR gas temperature and delivers an input signal to Engine Control Module (ECM).

Intake Air Temperature Sensor

Intake air temperature sensor is mounted in either airflow meter or air filter housing. Intake air temperature sensor measures incoming intake air temperature and delivers an input signal to THA terminal of Engine Control Module (ECM) for controlling fuel injection system, fuel pressure control (if equipped) and heated oxygen sensor systems (if equipped).

Knock Sensor

Knock sensor monitors ignition knock conditions and delivers an input signal to KNK or KNK1 and KNK2 terminals of Engine Control Module (ECM). The ECM uses input signal to determine ignition timing (spark advance) and control fuel injection system.

Manifold Absolute Pressure (MAP) Sensor

The MAP sensor monitors intake manifold intake air volume and delivers an input signal to Engine Control Module (ECM). The ECM uses input signal for controlling fuel injection system and ignition timing (spark advance).

Oxygen (O₂) Sensor

Oxygen sensor monitors exhaust gas oxygen content and delivers an input signal to Engine Control Module (ECM). The ECM uses input signal to determine fuel injection system operation. Some models may be equipped with more than one oxygen sensor and a sub-oxygen sensor. Some models may contain a heater to warm the oxygen sensor.

Park/Neutral Switch (A/T Models)

On some models, park/neutral switch delivers an input signal to NSW terminal of Engine Control Module (ECM), indicating gear position. The ECM uses information to control engine idle and fuel injection system. Park/neutral switch may also be referred to as Park/Neutral Position (PNP) switch.

RPM Signal

Crankshaft position and engine RPM are detected by pick-up coils in the distributor. Pick-up coils deliver input signal to the Engine Control Module (ECM) for controlling Pulsed Secondary Air Injection (PAIR) system (if equipped), fuel injection system, ignition timing (spark advance), idle speed control system, fuel pressure control system (if equipped), EGR system, A/C-cut control system on some models (if equipped) and heated oxygen sensor system (if equipped).

Crankshaft position input signal is delivered to terminal G, G+ or G1 (and G2 on some models) of ECM, and engine RPM input signal is delivered to NE or NE+ terminal of ECM.

Sub-Oxygen Sensor

Sub-oxygen sensor is used in conjunction with the oxygen sensor. Sub-oxygen sensor monitors exhaust gas oxygen content and delivers an input signal to Engine Control Module (ECM). The ECM uses

input signal to determine fuel injection system operation.

Throttle Position Sensor (TPS)

The TPS, mounted on throttle body, delivers an input signal indicating throttle position to the Engine Control Module (ECM). The ECM uses input signal for controlling Pulsed Secondary Air Injection (PAIR) system (if equipped), fuel injection system, ignition timing (spark advance), idle speed control system, fuel pressure control system (if equipped), A/C-cut control system (some models if equipped), EGR system (if equipped), intake air control valve system or variable induction system (if equipped) and automatic transmissions/transaxles (some models).

Vehicle Speed Sensor

Vehicle speed sensor monitors vehicle speed and delivers an input signal to Engine Control Module (ECM). The ECM uses input signal for controlling fuel injection system, idle speed control system and electronic control of automatic transmission/transaxle (some models). Vehicle speed sensor is mounted on the transaxle/transmission.

OUTPUT SIGNALS

NOTE: Vehicles are equipped with different combinations of computer-controlled components. Not all components listed are used on every vehicle. For theory and operation on each output component, refer to system indicated after component.

The Engine Control Module (ECM) receives input from data sensors and switches, depending on model application, to control following components and sub-systems:

A/C-Cut Control System
See IDLE SPEED under FUEL SYSTEM.

A/C Idle-Up System
See IDLE SPEED under FUEL SYSTEM.

Circuit Opening Relay
See FUEL DELIVERY under FUEL SYSTEM.

Air Control Valve (ACV)
See SUPERCHARGER under AIR INDUCTION SYSTEM.

Electronic Spark Advance
See ELECTRONIC IGNITION SYSTEM under IGNITION SYSTEM.

EGR System Vacuum Switching Valve (VSV)
See EXHAUST GAS RECIRCULATION (EGR) SYSTEM under EMISSION

SYSTEMS.

Electronically Controlled Transmission/Transaxle (ECT)
See TRANSMISSION/TRANSAXLE CONTROLS under MISCELLANEOUS

CONTROLS.

EVAP Vacuum Switching Valve (VSV)
See EVAPORATIVE EMISSION (EVAP) SYSTEM under EMISSION

SYSTEMS.

Exhaust By-Pass Valve Vacuum Switching Valve (VSV)
See TURBOCHARGERS under AIR INDUCTION SYSTEM.

Exhaust Gas Control Valve Vacuum Switching Valve (VSV)
See TURBOCHARGERS under AIR INDUCTION SYSTEM.

Fuel Pressure Control System Vacuum Switching Valve (VSV)
See FUEL DELIVERY under FUEL SYSTEM.

Fuel Pump
See FUEL DELIVERY under FUEL SYSTEM.

Idle Speed Control System
See IDLE SPEED under FUEL SYSTEM.

Idle-Up System
See IDLE SPEED under FUEL SYSTEM.

Intake Air Control Valve System
See INTAKE AIR CONTROL VALVE SYSTEM under AIR INDUCTION
SYSTEM.

Pulsed Secondary Air Injection (PAIR) System Vacuum
Switching Valve (VSV)
See PULSED SECONDARY AIR INJECTION (PAIR) SYSTEM under
EMISSION SYSTEMS.

Self-Diagnostic System
See SELF-DIAGNOSTIC SYSTEM.

Supercharger Relay
See SUPERCHARGER under AIR INDUCTION SYSTEM.

Supercharger By-Pass Valve
See SUPERCHARGER under AIR INDUCTION SYSTEM.

Throttle Opener Vacuum Switching Valve (VSV)
See IDLE SPEED under FUEL SYSTEM.

Turbocharging Vacuum Switching Valve (VSV)
See TURBOCHARGERS under AIR INDUCTION SYSTEM.

Variable Induction System Vacuum Switching Valve (VSV)
See VARIABLE INDUCTION SYSTEM under AIR INDUCTION SYSTEM.

Wastegate Vacuum Switching Valve (VSV)
See TURBOCHARGERS under AIR INDUCTION SYSTEM.

FUEL SYSTEM

FUEL DELIVERY

Vehicles are equipped with different combinations of fuel system electrical components. For complete wiring circuit of electrical components on a specific model, see appropriate wiring diagram in L - WIRING DIAGRAMS article.

EFI Main Relay

The EFI fuse supplies constant battery voltage to EFI main relay. EFI main relay provides battery voltage to circuit opening relay (some models), data link connector and various other electrical components. Depending on model, EFI main relay may either be turned on directly by ignition switch or by M-REL terminal of Engine Control Module (ECM). The EFI main relay may also provide battery voltage to +B and +B1 terminals of ECM when ignition is turned on. The EFI main relay is located in compartment relay box. See Figs. 1 and 2.

NOTE: Circuit opening relay is used on all models.

Circuit Opening Relay

Circuit opening relay controls fuel pump circuit. When engine is cranking, circuit opening relay receives a start signal.

Start signal energizes circuit opening relay during cranking. Circuit opening relay then provides voltage to fuel pump.

Fuel Pump

Fuel pump is mounted in the fuel tank and contains an internal check valve. Fuel pump can be operated with ignition off by installing jumper wire between +B and FP terminals of data link connector.

Fuel Pressure Regulator

Mounted on fuel rail, vacuum-operated fuel pressure regulator maintains constant fuel pressure to fuel injectors. As throttle is depressed and manifold vacuum decreases, fuel pressure regulator increases fuel pressure to maintain a constant fuel flow to fuel injectors.

NOTE: Fuel pressure control system may also be referred to as fuel pressure-up system.

Fuel Pressure Control System (2.2L)

Fuel pressure control system increases fuel pressure slightly on hot restarts for improved starting and idle stability. Fuel pressure increase is obtained by shutting off vacuum supply to fuel pressure regulator.

The ECM controls vacuum supply to fuel pressure regulator by operating fuel pressure control system Vacuum Switching Valve (VSV). Increased fuel pressure will exist for approximately 90-180 seconds after hot restart. Fuel pressure control VSV is located in engine compartment. See Figs. 1 and 2.

FUEL CONTROL

Fuel-Cut System

Controlled through input from throttle position sensor, Engine Control Module (ECM) will shut off fuel delivery during closed throttle deceleration.

Fuel Injectors

Fuel injectors are ECM-actuated electric solenoids which deliver fuel to individual cylinders. The ECM controls fuel injector duration based on various input signals to determine air/fuel mixture.

NOTE: Solenoid resistor may also be referred to as injector resistor or MFI or SFI resistor.

IDLE SPEED

A/C-Cut Control System

The A/C-cut control system interrupts A/C compressor operation for a fixed period of time when vehicle accelerates from low engine speed.

On 2.2L (5S-FE), Engine Control Module (ECM) uses vehicle speed and Throttle Position Sensor (TPS) input signals to determine A/C-cut control system operation. On 1.8L (7A-FE), ECM uses vehicle speed, Throttle Position Sensor (TPS) and Manifold Absolute Pressure (MAP) sensor input signals to determine A/C-cut control system operation.

A/C Idle-Up System

The A/C idle-up system provides a stable idle speed when A/C is operating. Engine Control Module (ECM) controls A/C idle-up valve which allows extra intake air to by-pass throttle valve for increased idle speed. The A/C idle-up valve is located in engine compartment. See Figs. 1 and 2.

Idle Speed Control System

Engine Control Module (ECM) is programmed with engine idle speed values. Idle air control system provides a stable idle speed when engine is cold and idle speed decreases due to electrical load.

An input signal is delivered to ECM, indicating when high electrical output is required. Input signal is delivered when items such as rear window defroster, headlights, etc. are turned on. On all models, the ECM uses input signals to maintain proper idle speed by controlling Idle Air Control (IAC) valve located on air intake system.

Throttle Opener

Throttle opener is vacuum controlled and allows engine to return to specified RPM after throttle is released.

IGNITION SYSTEM


ELECTRONIC IGNITION SYSTEM

NOTE: The electronic ignition system may be referred to as Electronic Spark Advance (ESA).

The electronic ignition system uses the Engine Control Module (ECM) for determining ignition timing (spark advance). The ECM determines ignition timing (spark advance) based on various input signals. Following input signals may be used: engine coolant temperature sensor, throttle position signal, oxygen sensor, engine RPM, vehicle speed sensor, A/C switch, brakelight signal, airflow meter, knock sensor, electrical load, MAP sensor and cranking (starter) signal. Input signals may vary on model application. Integrated (ignition coil on distributor) and remote ignition coil designs are used depending on model.

Crankshaft position and engine RPM input signals are delivered to the ECM by 2 pick-up coils in the distributor. Crankshaft position input signal is delivered to G, G+ or G1 (and G2 on some models) terminal of ECM, and engine RPM input signal is delivered to NE or NE+ terminal of ECM.

ECM uses pick-up coil input signals to switch primary ignition circuit on and off. Primary circuit is turned off when ECM delivers a signal to ignitor on the IGT wire, causing ignition coil to fire the spark plug. After delivering a command to turn off primary circuit on the IGT wire, the ECM monitors IGF circuit to ensure primary switching occurred. See Fig. 3.

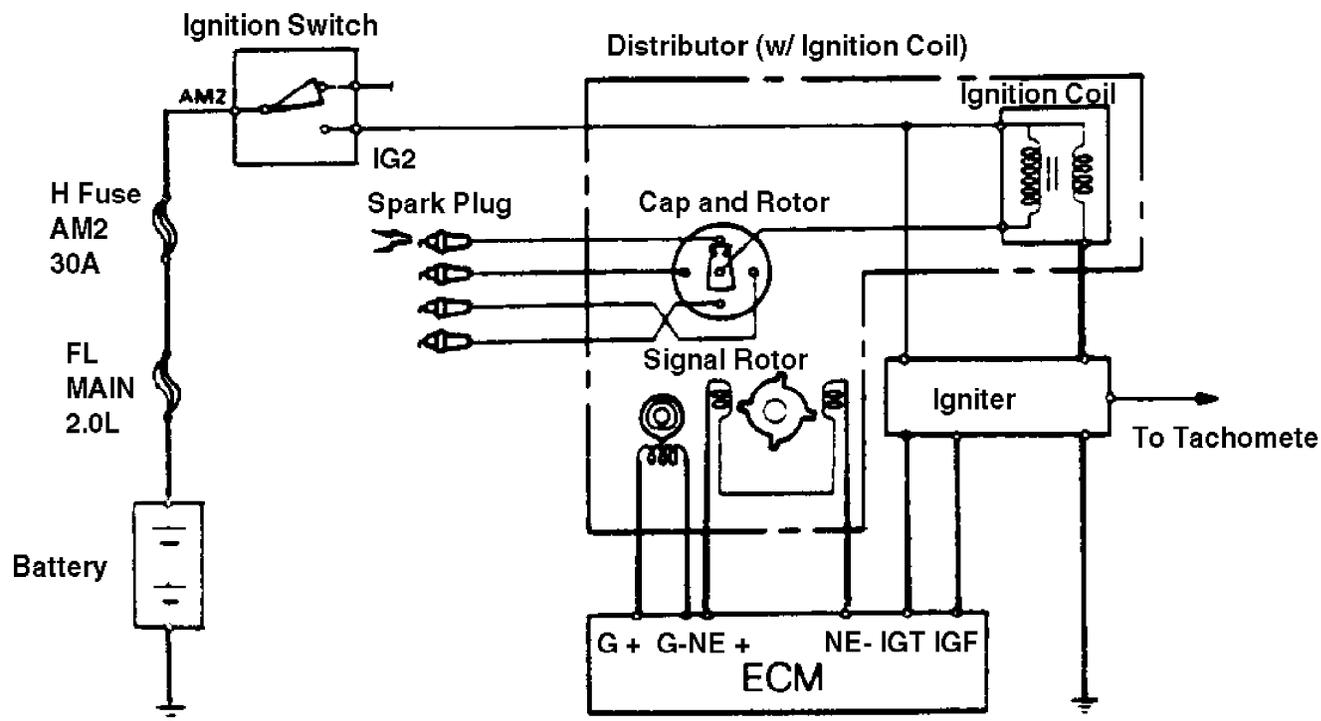

94I44402


Fig. 3: Typical Ignition System Schematic (4-Cylinder)
 Courtesy of Toyota Motor Sales, U.S.A. Inc.

EMISSION SYSTEMS

POSITIVE CRANKCASE VENTILATION

The Positive Crankcase Ventilation (PCV) system prevents crankcase hydrocarbon (HC) vapors from escaping into the atmosphere. Crankcase vapors are routed from crankcase through a vacuum-controlled PCV valve, into the intake manifold. In the intake manifold, crankcase vapors are mixed with air/fuel mixture and delivered into the cylinders. See Fig. 4.

The PCV system provides primary control of crankcase blow-by vapors, according to manifold vacuum. When manifold vacuum is high (at idle), PCV restricts vapor flow to maintain a smooth idle condition.

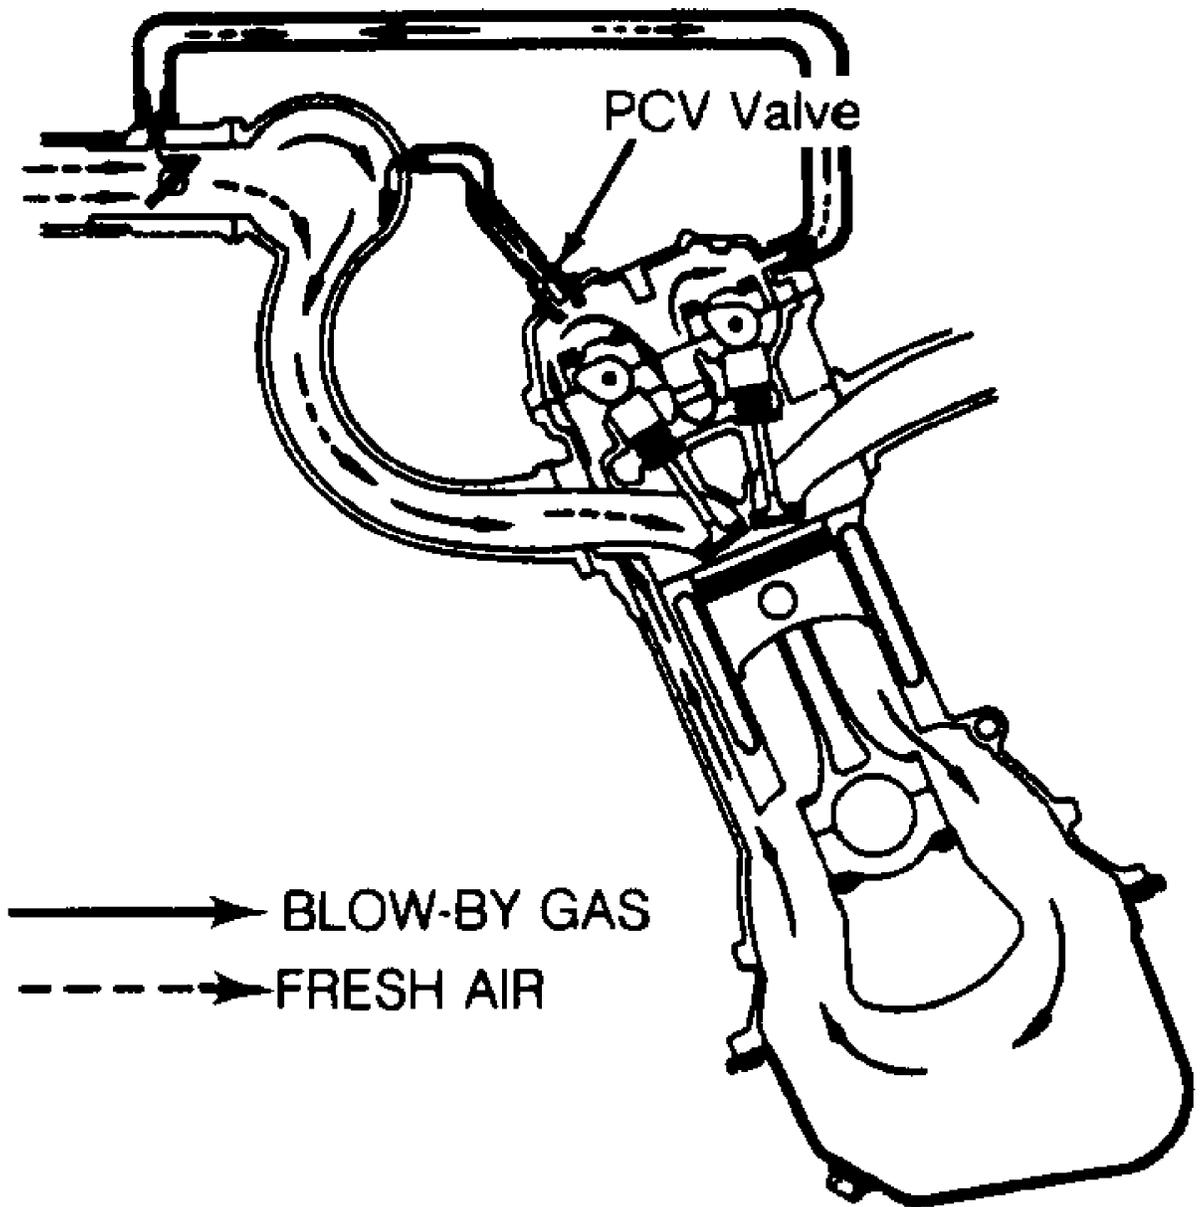

94C44406

Fig. 4: Identifying Typical PCV System (4 & 6-Cylinder)
 Courtesy of Toyota Motor Sales, U.S.A., Inc.


EXHAUST GAS RECIRCULATION (EGR) SYSTEM

The EGR system reduces oxides of nitrogen (NO_x) emissions by lowering combustion temperatures. Combustion temperatures are lowered by recycling metered amount of exhaust gases back into the intake system.

The EGR system contains a vacuum-operated EGR valve and a vacuum modulator. See Fig. 5. A check valve, EGR cooler, EGR Vacuum Switching Valve (VSV) and EGR gas temperature sensor may also be used.

Vacuum modulator regulates exhaust backpressure and balances atmospheric pressure and vacuum to allow EGR operation at heavy throttle.

Engine Control Module (ECM) controls EGR VSV for EGR operation. This system is referred to as EGR-cut control system. The ECM uses input signals such as engine coolant temperature, engine RPM, throttle position signal, brakelight signal, airflow meter and vehicle speed for controlling the EGR VSV. Input signals may vary by vehicle application. Various model and engine types will have different EGR system components and operating parameters. For specific EGR operating parameters and testing of system or components on various models, see EXHAUST GAS RECIRCULATION (EGR) under EMISSION SYSTEMS & SUB-SYSTEMS in I - SYSTEM/COMPONENT TESTS article.

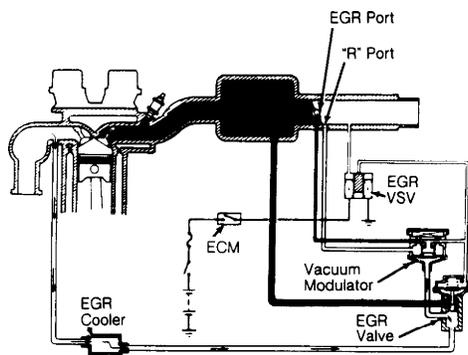

93B78452

Fig. 5: Identifying Typical EGR System Components
Courtesy of Toyota Motor Sales, U.S.A., Inc.

EVAPORATIVE EMISSION (EVAP) SYSTEM

NOTE: The EVAP may also be referred to as fuel evaporation.

The EVAP system prevents fuel tank gasoline vapors from escaping into the atmosphere. Fuel tank gasoline vapors are routed through charcoal canister into intake manifold for combustion in the cylinders. See Fig. 6.

All models use a EVAP Thermal Vacuum Valve (TVV) to control EVAP system in relation to engine coolant temperature. The EVAP TVV is mounted in the engine coolant passage.

NOTE: The EVAP Thermal Vacuum Valve (TVV) may also be referred to as a EVAP Thermal Valve (TV).

Various model and engine types will have different evaporative emission system components and operating parameters. For specific EVAP system operating parameters and system and component testing, see FUEL EVAPORATION under EMISSION SYSTEMS & SUB-SYSTEMS in I - SYSTEM/COMPONENT TESTS article.

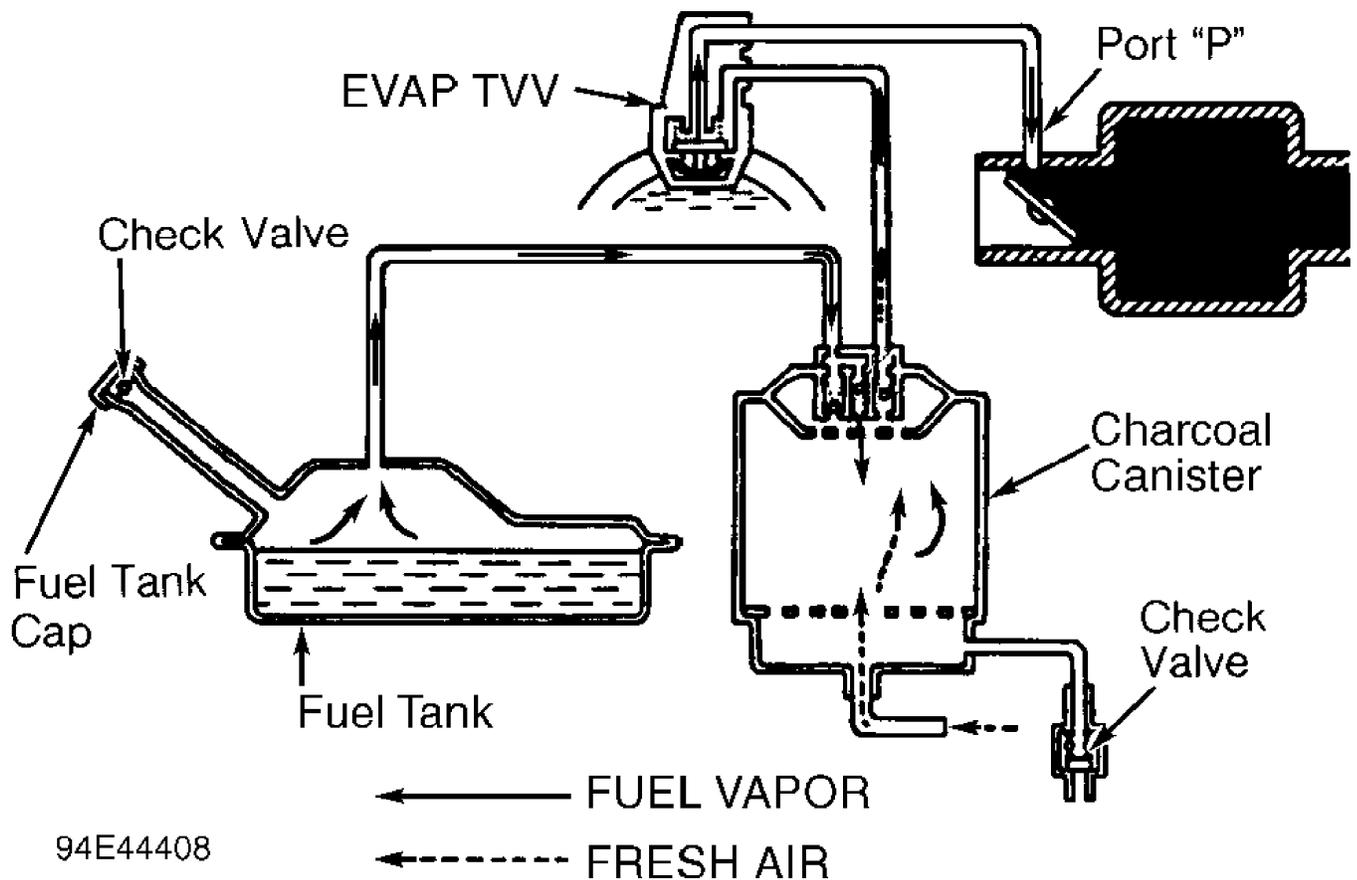


Fig. 6: Identifying Typical EVAP System Components
 Courtesy of Toyota Motor Sales, U.S.A., Inc.

SELF-DIAGNOSTIC SYSTEM

The Engine Control Module (ECM) is equipped with self-diagnostic system. By analyzing various input signals, ECM detects system malfunctions related to various operating parameters. When malfunction occurs, ECM will inform the driver by turning on Malfunction Indicator Light (MIL) on the instrument panel.

NOTE: The MIL may be referred to as the CHECK ENGINE light.

Diagnostic Trouble Codes (DTC) may be set by malfunction of various engine sensors, switches or circuits. DTC is stored in ECM memory. When diagnostic trouble code is stored, MIL on instrument panel will come on. Diagnostic trouble code can be retrieved for system diagnosis. For additional information on self-diagnostic system, see articles listed below:

- G - TESTS W/CODES - 1.8L
- G - TESTS W/CODES - 2.2L